

Highlights:

- 19" Power distribution unit
- Male Schuko (CEE 7/7) input connection
- Black aluminum housing
- Chassis earth connection point
- 16A ~ 250 VAC / 4000 W Max
- 2.5 meter fixed connection cable
- Dimmable rack lighting (LED) with ON/OFF switch
- Charging front USB front connection (2x)
- 3 x 2.5 mm² cable diameter



The PSR529 series includes a switchable LED rack light, two front USB jacks and a 16 Amps circuit breaker on the front panel of the unit. Power surge & spike protection is offered by the internal protector network, while a voltage and current indicator allow continuous voltage and power consumption monitoring. Power distribution for up to nine devices is made possible using the rear output sockets.

Product Features:

Dimensions	483 x 44.7 mm (W x H) (with mounting ears)
Cable length	2.5 m
Unit height	1 HE
Weight	1.92 kg
Power handling	250 V AC ~ 16 A / 4000 W
Surge protection	Maximum continuous working voltage (Ur): < 1000V Nominal discharge current (8/20µS) In: 10 KA Voltage protection level (Up): < 1000 V Response time (tA): < 25 nS Insulation resistance (Ris): > 100 MΩ
USB	2 x USB Type A connections 5V / 2.1 A supply (two ports combined)
LED Light	Switchable ON/OFF (switch) Dimmable between 25% and 100% Max. 70 lumen

Physical Characteristics:


Inner conductor


Section

3 x 2.5 mm²

Variants:

- PSR529G/B - Black version

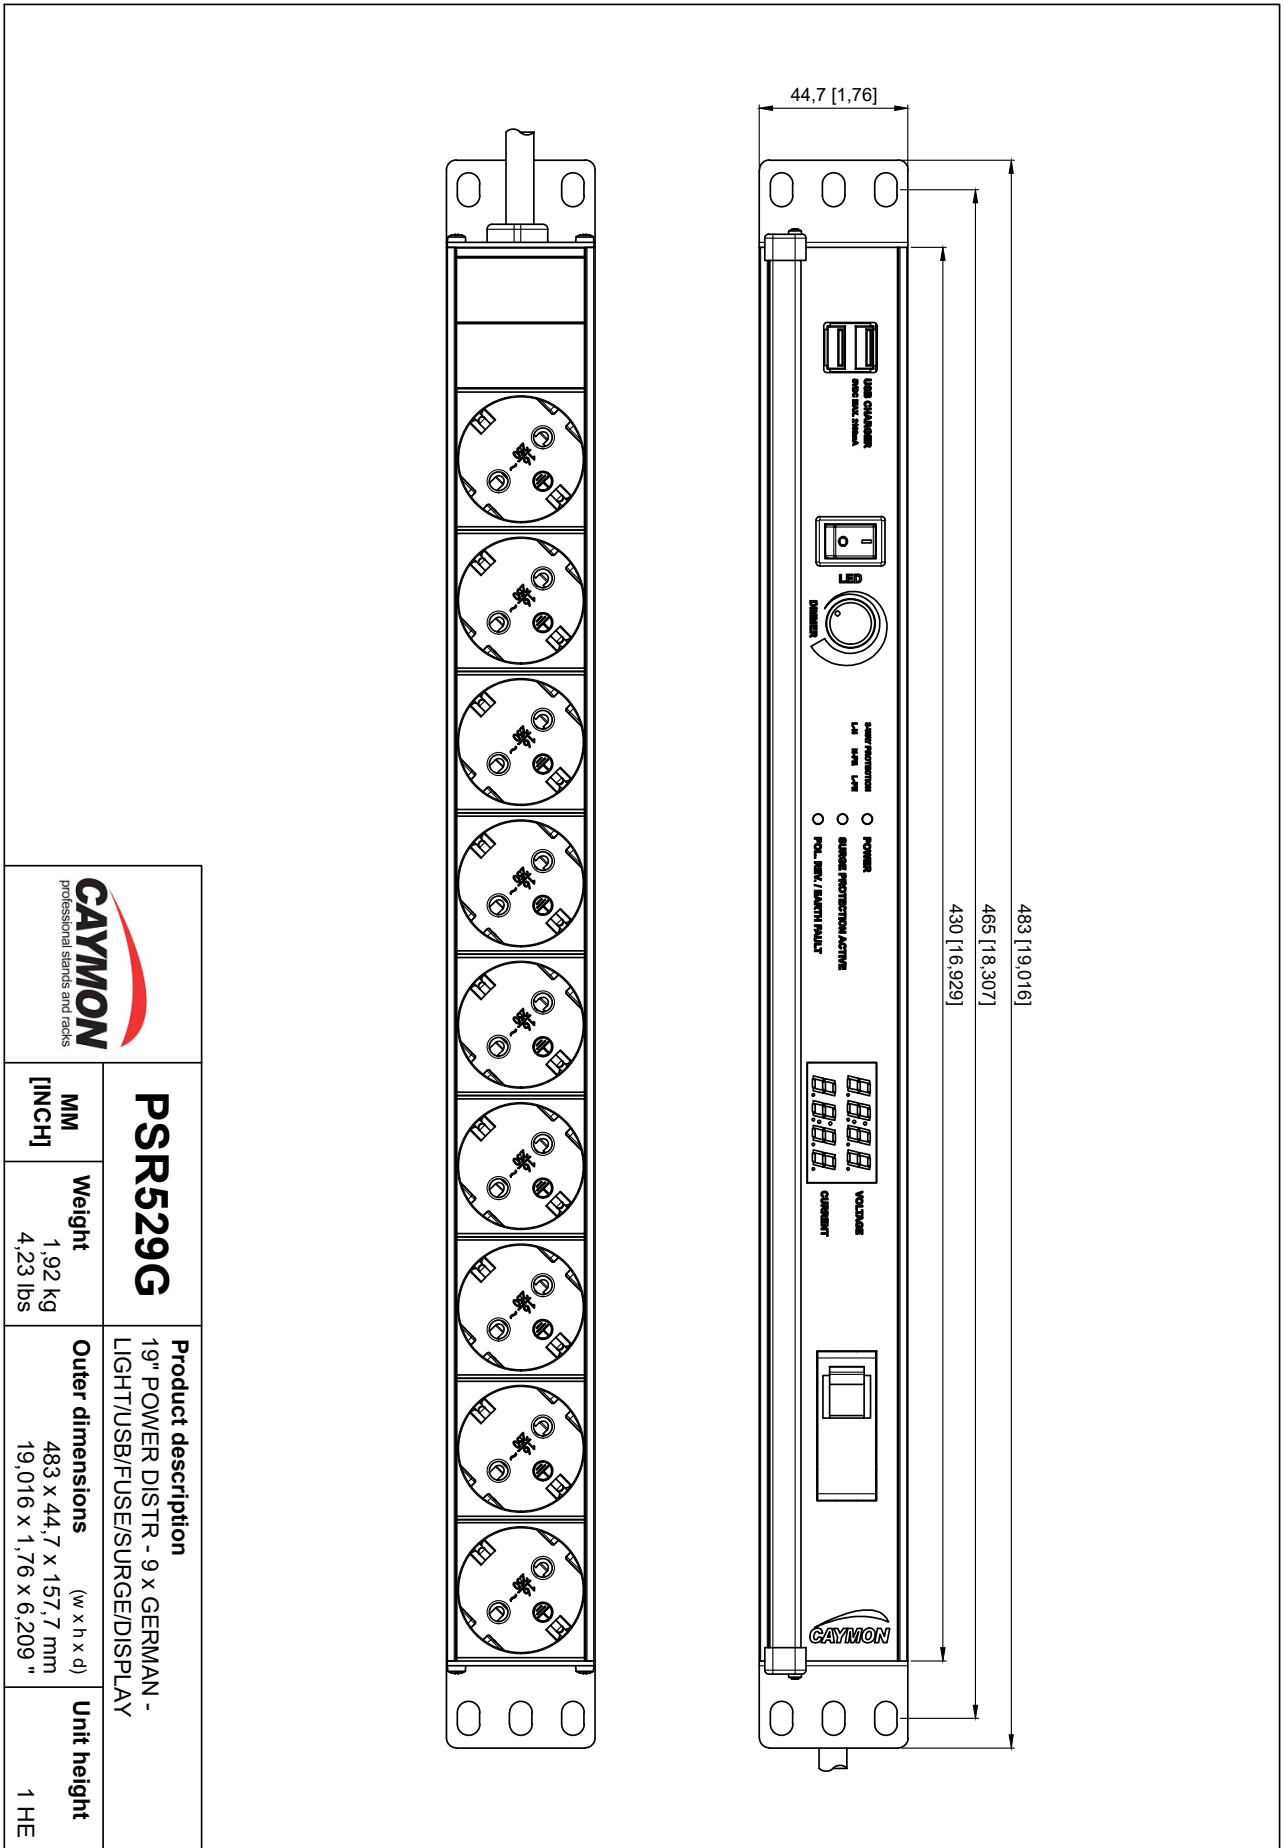

 professional stands and racks		PSR529G		Product description	
		MM [INCH]	Weight	19" POWER DISTR - 9 X GERMAN - LIGHT/USB/FUSE/SURGE/DISPLAY	
	1,92 kg 4,23 lbs	Outer dimensions (w x h x d) 483 x 44,7 x 157,7 mm 19,016 x 1,76 x 6,209 "		1 HE	