

MAIN ACCESSORIES (for an updated and exhaustive list visit www.wisyc.com)

SL54-IK: "Slot-in" compatible with Sound Device SuperSlot, MRK16 Multi Slot rack, Unislot (Ikegami, Panasonic cameras)

BPA54: "Stand alone" rear panel (2 mini XLR-5pin male outputs + 1 Hirose for power)

CDC34: External power feeding cable, hirose 4pin Male/raw wires (50 cm)

SL54-SX2: "Slot-in" kit for Sony camera

CAM50-3: AF cable (50 cm), mini XLR-5F / 2 XLR-3M connectors

CAM50-41: AF cable (50 cm), mini XLR-5F / 1 XLR-3M connector (Line 1)

CAUSBC1: USB Cable 1m
USB B - USB C Male Black

BCA54: Stand Alone with lithium battery pack RRC2040 33.2Whr
- 2 mini XLR-5pin male audio outputs
- 1 Hirose connector for external power

EU DECLARATION OF CONFORMITY

Manufacturer's Name: WISYCOM S.r.l.

Manufacturer's Address: via Tiepolo , 7/E- 35019 Tombolo (PD) - Italy

declare under our sole responsibility that the product

Model: MCR54-DUAL

Description: Wireless ENG receiver

conforms to the essential requirements of the RADIO Directive 2014/53/EU

– Radio Equipment Directive (RED):

EN 300 422-1 v2.1.2

EN 301 489-1 v1.9.2

EN 301 489-9 v2.1.1

EN 62368-1 2014

EN IEC 63000:2018

USA and CANADA

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1 - This device may not cause harmful interference, and
- 2 - This device must accept any interference received, including interference that may cause undesired operation.

In compliance with:

USA FCC 47 CFR 15 Subpart B

CAN RSS-Gen/CNR-Gen



ISTR-MCR54-DUAL-#MCR54-DUAL Quick user guide v1.3

Serial Number:

Purchase Date:

This guide is intended to assist you with initial quick setup and operation for your Wisycom product.

You can refer to Wisycom Authorized Distributors for technical Support and information about service and repairs available in your area or contact us directly by email.

WISYCOM S.r.l.

Via Tiepolo 7/E

35019 Tombolo (PD) - ITALY

+39 0424 382605

support@wisyc.com
sales@wisyc.com

WISYCOM INC.

14301 Sullyfield Circle

Suite C

Chantilly, VA 20151- USA

+1 703-574-7505

support.us@wisyc.com
sales.us@wisyc.com



Download Documentation and Firmware

Get declaration, user manual, tips, specifications, software on the download page:

wisyc.com/products/d/MCR54-DUAL



Product Registration and Warranty

Register your product to extend your warranty and receive update on latest firmware:

wisyc.com/products/my-account



Keep up with Wisycom online


Follow us on Facebook and Instagram. You can also subscribe on Youtube for more.

wisyc.com/social



Aux/Top Output

Mini XLR 5pin connector for 2 analog channels or 2 digital channels outputs (AES3)

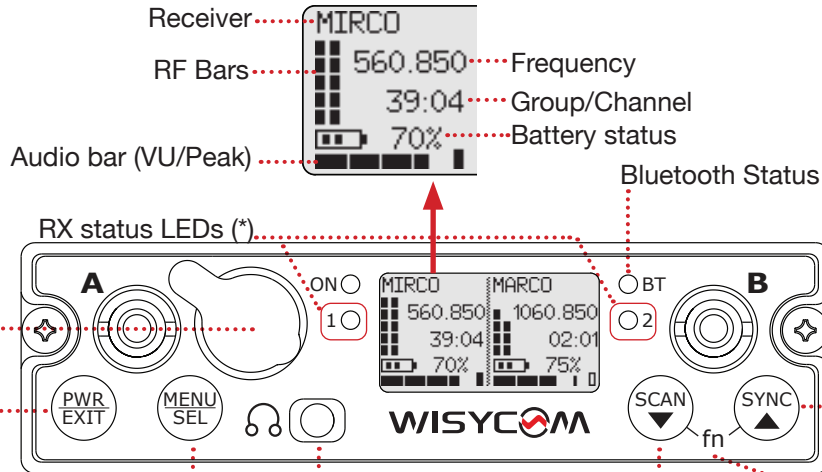

PWR Button

Press & hold to switch ON/OFF the unit.
Short press to step back into menu

Menu Button

Press this button to enter the main menu and select menu options.
Press and hold to **SAVE**

Scan/Down

Press & hold to launch a freq. **SCAN**.
Short Press to scroll down into the main menu or to access the rotary quick menu.

Headphones

Short Press **PWR+MENU** to access headphone menu

Antenna A/B(**)

When the MCR54-DUAL turns on, a message will tell you which antennas to use

Sync/Up

Press & hold to launch a **SYNC** with a Wisycom transmitter.
Short Press to scroll up into the main menu or to access the rotary quick menu.

Fn

Short Press **Scan+Sync** to access custom function menu

(*) RX STATUS LED (1/2)

- — **OFF:** receiver is not active
- — **RED:** RF level/quality below squelch (mute)
- — **GREEN:** level above squelch & antenna B is active
- — **BLUE:** level above squelch & antenna A is active

	Color	Code	Band MHz	L (mm)
Antenna type	black	AWN42	470-700	123
	green	AWS-GN	670-870	78
	blue	AWS-BL	940-1160	63
	red	AWS-RD	1240-1260	55